

b10

Taris



PRODUCT CARD



P-IMP-MKT-XX · 0423-1 EN

be bath
be a ten

Taris



150x75 cm

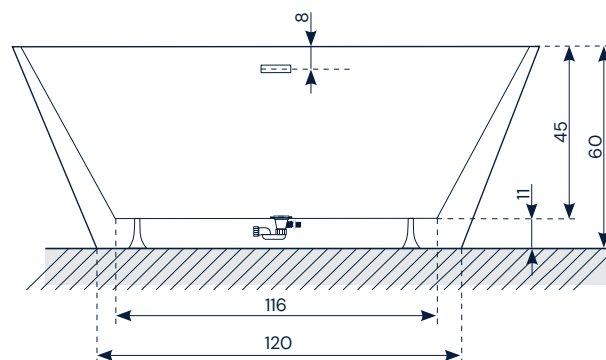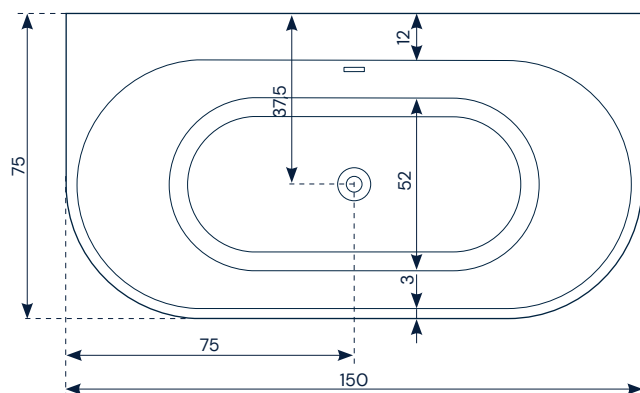Acrylic




Bath height: 60 cm

Technical characteristics

	 HBSystem  Air System	
Capacity	230 l	
Bathtub weight	42,00 kg	
Weight with hydro	56 kg	45 kg
Shipping weight	64 kg	50,00 kg
Shipping volumen	0,73 m ³	
Shipping dimensions	1,54 x 0,62 x 0,79 m	

Preinstallation

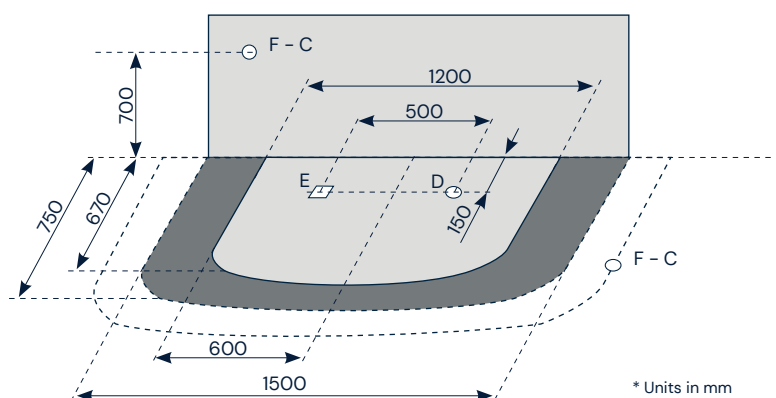

NOTE: Installation must be carried out with finished walls and flooring.



F Cold water connection for taps
C Hot water connection for taps

D Drain connection Ø 40 mm
E Electrical connection IPX5

Taris

170x90 cm

Acrylic

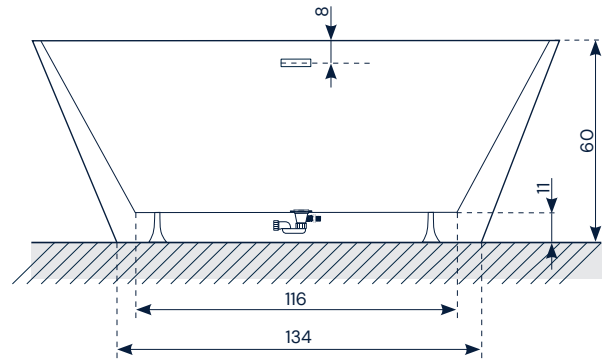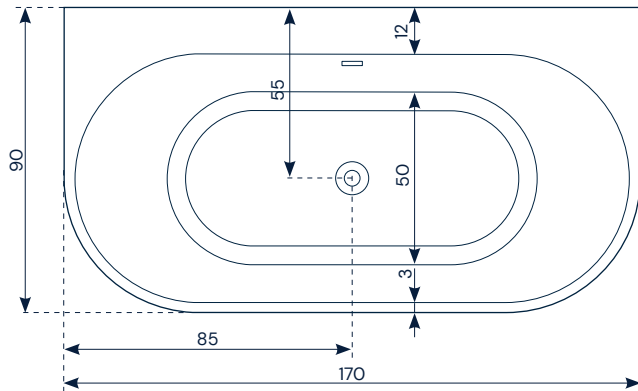


Bath height: 60 cm

Technical characteristics

	HBSYSTEM		AIR SYSTEM
Capacity	270 l		
Bathtub weight	50,00 kg		
Weight with hydro	64,00 kg		55,20 kg
Shipping weight	76,00 kg		67,20 kg
Shipping volumen	1,805 m ³		
Shipping dimensions	1,72 x 0,61 x 0,92 m		

Preinstallation

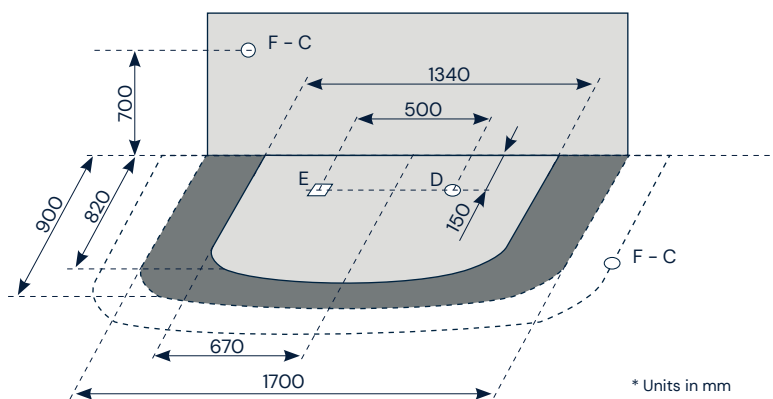

NOTE: Installation must be carried out with finished walls and flooring.

F Cold water connection for taps
C Hot water connection for taps


D Drain connection Ø 40 mm
E Electrical connection IPX5

Taris

Acrylic



NOTE: If the bath has a built-in faucet (cascade), the water intakes must be about 300 mm from the floor and on the wall closest to the wall position.

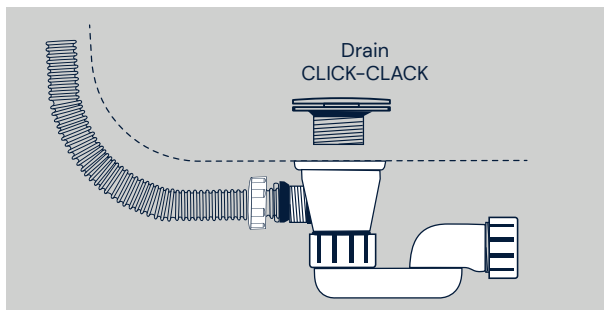

WARNING, BEFORE CONNECTION AND DEFINITIVE INSTALLATION OF THE BATH: Build or install the necessary support and then check that the bathtub is correctly seated on it, if everything is correct, proceed to make the connections and to the final positioning of the bathtub.

b10 recommends fitting the bathtub with panels. Otherwise, removeable plasterboard partitions or similar should be made, leaving a ventilation register on the motor side of about 30x30cm. b10 shall in no case bear the costs of the work and materials required for the removal of the product for inspection or repair.

Electrical characteristics

	HBSYSTEM	Air System
Motor	1.350 W	-
Air blower	-	350 W
Heating	-	-
Chromotherapy	-	-
Total consumption	1.350 W	350 W
Intensity	6,13 A	1,59 / 3,18 A
Voltage	220 V	220 / 110 V
Frequency	50 / 60 Hz	50 / 60 Hz
Sanitisation	-	-

Hydraulic characteristics

	HBSYSTEM	Air System
Water flow rate	250 l/min	-
Air flow rate	-	1.067 l/min
Sanitisation intake	NA	NA

NA Not available
OP Optional

Electrical safety

The whirlpool bathtubs are manufactured in accordance with the European regulations EN60 335-2-60.

The bathtub must be connected to a fixed mains installation in accordance with IEC 364 and current legislation. The electrical connection must be suitable for current consumption, equipped with an efficient ground connection and protected against splashes IPX5.

The bath must be connected to the mains supply by means of a double-polarity differential switch with a maximum of 30 mA and a magnetothermic switch suitable for product consumption with a minimum opening between contacts of 3 mm.

All our bathtubs have a ground connection used for their additional equipotential bonding between all existing ground in the bathroom (EC 364-7). It is prohibited any electrical connection in a radius of at least 60 cm and a minimum height of 230 cm round the tub.

Hydraulic installation

Predispose the hot and cold water connections of the taps for bathtub filling and drain connection (see recommendations).

In the event that the hardness of the water supplied is too high and to ensure the proper functioning of the equipment, it is advisable to install a descaler.

For version with sanitisation intake it is recommended to install at the indicated point a stopcock with filter.

Taris


Acrylic




Glossy White

Systems

HbSystem

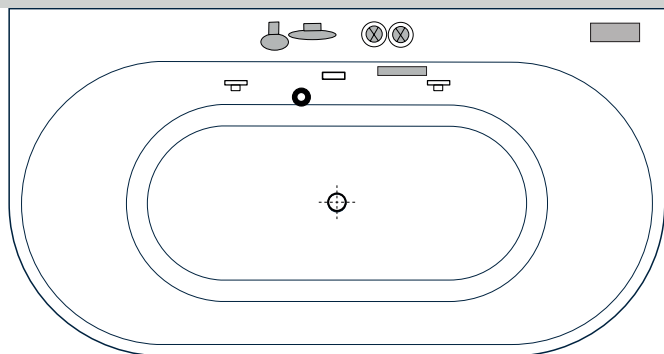

AirSystem

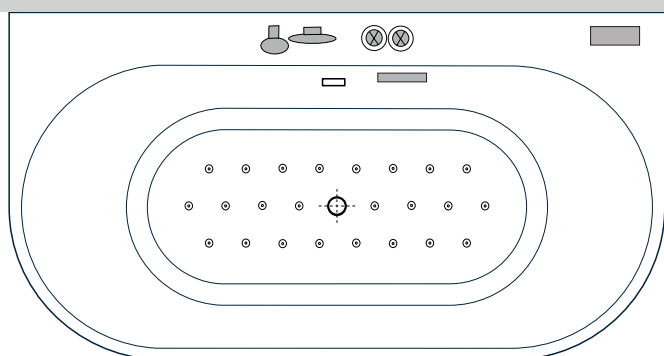

Equipment

	HbSystem	Air System
Motor	●	x
Jets	2	x
Suction	●	x
Air blower	x	●
Air nozzles	x	24
Dorsal jets	x	x
Click-clack drain	●	●
Overflow	●	●
Pneumatic push	x	x
Electronic push	●	●
Chromotherapy	Optional	Optional
Heating	x	x
Sanitisation	x	x
Aromatherapy	x	x
Light	Optional	Optional
Bathroom taps	Optional	Optional
Level sensor	●	x
BConnect	x	x
Panels	x	x
Automatic stop	●	●

x Not available

● Available

* The number and position of the elements may vary depending on the model of fitting to be installed.

The data and characteristics indicated do not bind BAÑOS 10 S.L., which reserves the right to make any changes it deems appropriate, without being bound by it upon prior notice or replacement. Valid data except error or omission.



Ctra. Onda - Vila-real, Km. 12,6
12200 Onda (Castellón) Spain
+34 964 626 300

Customer service export@b10bath.com
www.b10bath.com