


## JEE-O original shower O1 specifications



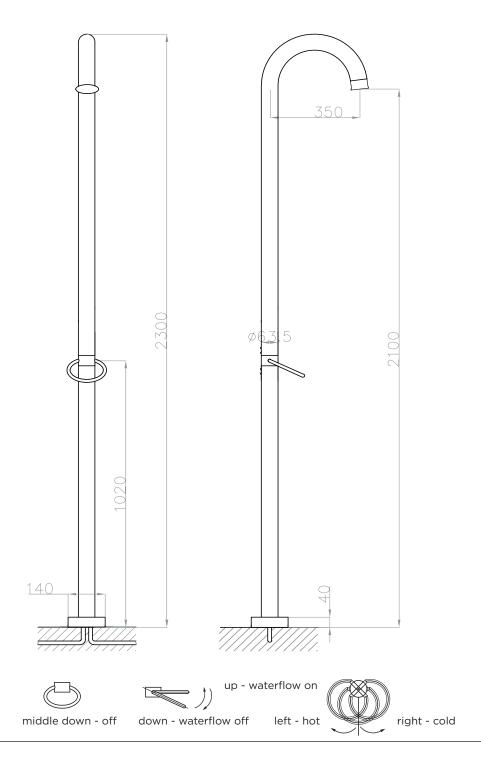

田田  $30 \, \text{mm} \, / \, 0.12$ " heart to heart joint with male thread ø15mm/0.6" max. 40mm/0.16' solder copper minimal for the purpose of mounting screws

Article code:

Cleaning:

100-6100

brushed stainless steel

100-6101 polished stainless steel

Material: Stainless Steel r304

Sedal ceramic mixing mechanism (35mm), item code **005-0101** JEE-O protect Cartridge:

Flow  $^{\text{at water of } 38^{\circ}\text{C}/100,4^{\circ}\text{F}}$ : 12I p/m at 3bar pressure

Connection:

 $2 \times G \frac{1}{2}$ " (ø15mm / 0.6") nylon<sup>(out)</sup>/epdm<sup>(in)</sup> flexhose with brass swivel

British Standard Pipe (BSP) Thread: L 158 x W 18 W 54 x H 16 cm 11.2 kg 2.0 kg

Dimension package: Total weight: Package weight:

Placing on a water-tight floor

2 year warranty

Approvals:

HS code: 84818011900

SLS BS EN 817, SS 375, AS/NZS 4020, BS EN



