


JEE-O pure shower O2 specifications







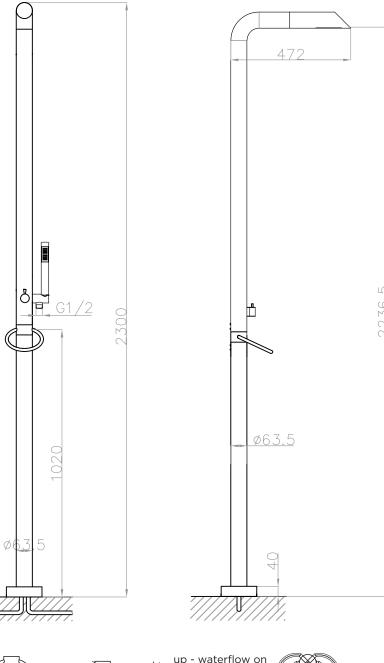

up - waterflow on



right - cold

田田 $30 \, \text{mm} \, / \, 0.12$ " heart to heart joint with male thread ø15mm/0.6" max. 40mm/0.16' solder copper minimal for the purpose of mounting screws

Article code:

300-6210

down - waterflow off

brushed stainless steel

300-6211

polished stainless steel

Material:

Stainless Steel r304

Cartridges:

Sedal ceramic mixing mechanism (35mm), item code 005-0101 and JEE-O ceramic diverter mechanism, item code 005-0302

JEE-O protect

Flow at water of 38°C /100,4°F.

Flexhose:

11L p/m at 3bar pressure

150 cm length

Connection:

2 x G $\frac{1}{2}$ " (ø15mm / 0.6") nylon^(out)/epdm⁽ⁱⁿ⁾ flexhose with brass swivel

British Standard Pipe (BSP)

Thread: L 158 x W 18 W 54 x H 21 cm 13.1 kg

Dimension package: Total weight: Package weight:

Placing on a water-tight floor

2 year warranty HS code: 84818011900

Approvals

